



MSA's Workman® Rescuer provides fast, easy and intuitive fall protection with integral bidirectional retrieval capability. Once the Workman® Rescuer has arrested the fall, its rescue retrieval capabilities allow the user to ascend or descend to a safe location.

This durable, economical addition to the Workman Series of products offers fast installation and setup, ideal for applications where time and ease of use are a priority.

The Workman® Rescuer is also a standalone retractable device, as the carrying handle may be used as an anchorage attachment.

Applications


Exclusive integral bracket uses existing tripod pin, leaving fewer components to attach, or become damaged or misplaced. Fall protection/retrieval mode knob simply pulls and rotates to activate. Use this device as a component of a confined space system for one application and as a standard self-retracting lanyard for another.

- Experienced and even novice users can learn setup and operation quickly and effectively
- Comparable size and weight to competitive products
- Great for OGP turnarounds, construction, utilities and other confined space applications
- QR code on product label offers instant access to setup video and additional information



Features & Benefits

- User capacity up to 140 kg
- Galvanized or stainless steel 5 mm wire rope
- Integral mounting bracket
- Color-coded switch for retrieval mechanism activation
- Ergonomic, stainless steel carrying handle can also be used as anchorage connection point
- Built-in shock absorber
- Robust aluminum housing with thermoplastic bumpers
- Self-locking swivel snaphook with load indicator
- Stowable, foldable crank handle
- RFID-enabled
- Certified to: EN 360, EN 1496, Class B

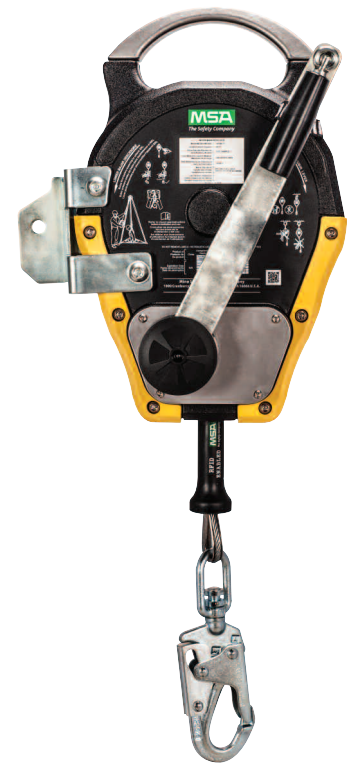

Product Specification

Net weight	16.3 kg (includes bracket)
Crank handle material	Carbon steel with zinc plating
Housing material	Cast aluminum
Lifting and lowering gear ratio	Gear ratio: 5:1
Maximum arresting force	6 kN

Ordering Information

Part No.	Description
10158192	Workman® Rescuer, stainless steel cable, 15 m